

# Maple Quick Start

© Maplesoft, a division of Waterloo Maple Inc. 2010.

All rights reserved. This product and content is protected by copyright. You may not copy, modify, transmit or reproduce this content without permission in writing from Maplesoft.

## ▼ Introduction

In this introductory course, you will become familiar with and comfortable in the Maple environment. You will learn how to use context menus, task assistants, and palettes to perform powerful analyses and create high-impact graphics with only a minimal knowledge of commands. You will also learn how to create technical reports that capture the knowledge behind an analysis directly in the Maple document. This course will give you the tools you need to get started quickly, and a solid foundation upon which to build your future Maple explorations.

To try this material on your own, start with an empty Maple document. Perform the steps found in the left column of each table below. The results of each step are displayed in the right column for your reference.

**Note for non-Windows or international users:** The keystrokes given in this document are for Windows using a QWERTY keyboard. If you are using a different platform or keyboard, see Help> Quick Help for the list of the most common keystrokes.

## ▼ Talking to Maple

In this section, you will learn the basics of asking Maple a question and getting a result.

Steps	Results
<p><b>Using [ENTER]</b></p> <p>When you launch Maple you start with a blank document, with menus and toolbars at the top, palettes on the side. At the cursor, you can start typing math. Press [ENTER] to see the result.</p> <p><i>Example:</i> Type "1+2 [ENTER]". Notice that the result appears on the next line.</p>	<p style="text-align: center;"> <math>1 + 2</math> </p> <p style="text-align: center;"> <span style="color: blue;">3</span> </p> <p style="text-align: right;">(2.1)</p>

## Using [Ctrl][=]

In the example above, we obtained a result by pressing [ENTER] after our input.

You can also get Maple to return the result on the same line as your question by typing [Ctrl][=] (hold down the control key, then press the = key).

*Example:* Type "x+5-2" then [Ctrl][=].

$$x + 5 - 2 = x + 3$$

## Context Menus

You can use Maple's context menus to perform a wide variety of mathematical and other operations.

*Example:* Place your cursor on the last result, and right-click. The context menu offers several operations to choose from according to the expression that you are using. To integrate this expression, select **Integrate**, then **x**.


*Example:* To plot the result of the integration, right-click on the result, and then select **Plots > 2-D Plot**.

The context menus are self-documenting. The text above the arrow shows what operation has been performed.

$$x + 5 - 2 = x + 3 \xrightarrow{\text{integrate w.r.t. } x} \frac{1}{2} x^2 + 3x$$

$$x + 5 - 2 = x + 3 \xrightarrow{\text{integrate w.r.t. } x} \frac{1}{2} x^2 + 3x$$


→

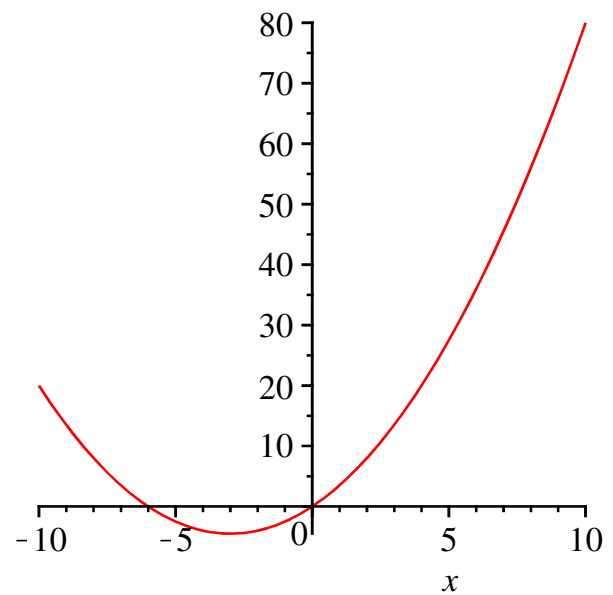

## Changing the Problem

Mathematics in a Maple document are *live*. You can go back, make changes, and re-execute the problem to obtain a new result.

**Example:** Go back to your original calculation of "1 + 2", change the number "1" to a "3" and press [ENTER]. Note the change in output.


**Example:** In the context menu example, above, change the "x" to "10 x". Highlight the entire line, including the plot, then click the execute button, , found at the top of the Maple worksheet. All selected calculations are updated.


$$3 + 2$$

5

(2.2)

$$10x + 5 - 2 = 10x + 3 \xrightarrow{\text{integrate w.r.t. } x} 5x^2 + 3x \rightarrow$$

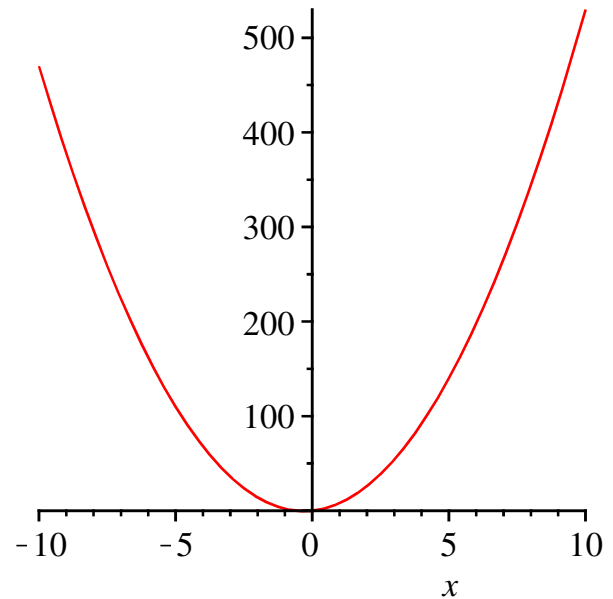

**Tip:** Clicking on the "execute all" button, , recalculates the entire document.

## ▼ Entering Math

There are a number of methods to enter math into Maple. You can enter math using a combination of palettes, keyboard shortcuts, context menus and commands. Most operations can be entered in more than one way, so you can pick the method you are most comfortable with.

Steps	Results
<p><b>Exact Answers and Numeric Approximations</b></p> <p>Maple calculates exact answers (i.e. fractions remain as fractions).</p> <p><i>Example:</i> On a new line, enter <math>1/2 + 1/3</math>. Note that the / automatically moves you to the denominator. The right-arrow will take you out. Press [Ctrl][=] to see the result on the same line.</p> <p>Maple also calculates numeric approximations. <i>Example:</i> Right-click the above result and select <b>Approximate</b> from the context menu. Select accuracy of 5 digits.</p> <p>If your problem uses decimal approximations already, Maple will return the answer in the same format. <i>Example:</i> Try the example on the right.</p> <p>You can apply different formatting to numeric results. <i>Example:</i> Right-click the above result and select <b>Numeric Formatting...</b> from the context menu. Select Scientific, then press Apply Formatting.</p>	$\frac{1}{2} + \frac{1}{3} = \frac{5}{6}$ $\frac{1}{2} + \frac{1}{3} = \frac{5}{6} \xrightarrow{\text{at 5 digits}} 0.83333$ $0.5 x + \frac{1}{3} x = 0.8333333333 x$ $0.5 x + \frac{1}{3} x = 8.33 \times 10^{-1} x$

## Palettes

Maple has over 1000 palette symbols within the 20 palette menus. You can also use Maple's expression palette to input data. The expression palette contains fill-in-the-blank templates for common operations.

**Example:** Use the Expression Palette, find the integral of  $4 \cdot t^6 + \sin(t) dt$ . Open the expression palette (click on **Expression** on the left-hand side of your Maple document) and click the indefinite integral button. An indefinite integral template will appear in your worksheet. Fill in the placeholders (use [TAB] to move to the next placeholder). When done, press [ENTER] to evaluate.

**Note:** Use ^ to create a superscript, and right-arrow to get out again.

**Example:** Use the expression palette to find the limit of a function.

**Tip:** Put frequently used palette entries on the Favorites Palette. Right-click on the palette button and select **Add to Favorites Palette**.

$$\int 4 \cdot t^6 + \sin(t) dt = \frac{4}{7} t^7 - \cos(t) \quad (3.1)$$

$$\lim_{x \rightarrow 0} \frac{\sin(x^2)}{x} = 0$$

## Symbol Recognition

You can use the **Handwriting palette** to find the symbol you want.

**Example:** Enter  $\frac{100}{3}$ , then use the context menu to approximate the result to 5 digits. Open the symbol recognition palette, sketch the "approximation" symbol, and press the **Recognize** button. Drag the new symbol to your worksheet to replace the arrow.

$$\frac{100}{3} \xrightarrow{\text{at 5 digits}} 33.333$$

$$\frac{100}{3} \approx 33.333$$

## Symbol Completion

The symbol completion mechanism provides an alternative to palettes for entering symbols.

Type the first few characters of the symbol name, and press [Ctrl][Space]. Choose the symbol you want from the list.

*Example:* Try entering  $\pi^2 + \sqrt{x}$ . To enter  $\pi$ , type pi [Ctrl][Space]. For  $x$ , enter sqrt [Ctrl][Space].

$$\pi^2 + \sqrt{x}$$

$$\pi^2 + \sqrt{x}$$

(3.2)

## Case-Sensitivity

Maple is case-sensitive.

Example: Enter " $x + x$ ".

Example: Enter " $y + Y$ ".

Compare the results.

$$x + x = 2x$$

$$y + Y = y + Y$$

## Implicit Multiplication

Maple understands implicit multiplication.

Example: Type " 3 x " for "3 times x".

To multiply two variables, use a space.  
" x y " means "x times y", but " xy " means the variable whose name is "xy".

**Example:** Type "x [ space] y + xy ".  
If you choose to **Differentiate** using the context menu, you will see that x, y, and xy are treated as three separate variables due to the way they were entered.

You should be careful using implicit multiplication in Maple to avoid confusion with function calls. To us,  $f(x + 1)$  looks like a function call, and  $x(x + 1)$  looks like implied multiplication. Maple understands both of these as function calls.

**Example:** Enter  $\frac{x(x + 2)}{x}$  using no space, a space, and an explicit multiplication sign. Ask Maple to calculate each result so you can see the differences.

When multiplying with brackets you can use a space to achieve implicit multiplication, but it is usually safest to explicitly use the multiplication symbol.

$$3 \ x + 5 \ x = 8 \ x$$

$$x \ y + xy = x \ y + xy$$

$$f(x + 1) = f(x + 1)$$

$$\frac{x(x + 2)}{x} = \frac{x(x + 2)}{x}$$

$$\frac{x \ (x + 2)}{x} = x + 2$$

$$\frac{x \cdot (x + 2)}{x} = x + 2$$

## Mathematical Notation

Maple understands familiar mathematical notation.

For example, Maple understands that  $y'' + y' + y = 0$  is a differential equation in  $y(x)$ .

**Example:** Enter the equation listed above (using the single quote key for the prime notation). To verify that it is in fact a differential equation, select **Solve DE** from the context menu.

$$y'' + y' + y = 0 \xrightarrow{\text{solve DE}}$$


$$y(x) = \_C1 e^{-\frac{1}{2}x} \sin\left(\frac{1}{2}\sqrt{3}x\right) + \_C2 e^{-\frac{1}{2}x} \cos\left(\frac{1}{2}\sqrt{3}x\right)$$

<p><b>Label References</b></p> <p>Maple uses label references.</p> <p>Whenever you use [ENTER] to get a response, the result is automatically given a label reference. To refer to a previous result in a computation, use [Ctrl]+[L] and enter the label reference number.</p> <p><i>Example:</i> Multiply the result <math>\pi^2 + \sqrt{x}</math> (from above) by <math>x</math>, using labels.</p> <p>To reference an equation from another document, use <b>Insert &gt; Reference...</b></p>	$(3.2) \cdot x$ $(\pi^2 + \sqrt{x}) x \quad (3.3)$
<p><b>Maple Commands</b></p> <p>You can always enter Maple commands by typing them directly. Examples of Maple commands will be found throughout this course.</p> <p><i>Example:</i> A common command is the <b>assignment statement</b>, := (colon equals).</p> <p><b>Note:</b> Anything you want Maple to evaluate (e. g.. assignment statements), must be entered in Math mode. Anything entered in Text mode will be non-executable.</p>	$costA := 5 x$ $5 x \quad (3.4)$ $costB := 4 x$ $4 x \quad (3.5)$ $costA + costB$ $9 x \quad (3.6)$

**Tip:** Find the list of keyboard shortcuts for your platform. Click **Help > Quick Help** menu, and select **Math Editor Shortcuts**.

## ▼ Combining Text and Math

In Maple you can combine math and text in the same paragraph to help formulate mathematical sentences.

Steps	Results
<p><i>Example:</i> Start by entering a simple computation.</p> <p>Go back to the start of your computation (place the cursor to the left of your expression), press [F5] to change from math input to text input, and start typing text.</p>	$\int x^3 + x^2 + 3 \, dx = \frac{1}{4} x^4 + \frac{1}{3} x^3 + 3 x$ <p>The integral <math>\int x^3 + x^2 + 3 \, dx =</math></p> $\frac{1}{4} x^4 + \frac{1}{3} x^3 + 3 x$
<p>You can also input text in place of the equals sign (=). Click on the equals sign and replace it with some additional text.</p>	<p>The integral <math>\int x^3 + x^2 + 3 \, dx</math> is equal to</p> $\frac{1}{4} x^4 + \frac{1}{3} x^3 + 3 x$
<p>Place your cursor at the end of the output, press [F5], and complete the rest of the sentence.</p>	<p>The integral <math>\int x^3 + x^2 + 3 \, dx</math> is equal to</p> $\frac{1}{4} x^4 + \frac{1}{3} x^3 + 3 x$ , as you can plainly see.
<p>Modify some of the terms in the problem, highlight the entire sentence and press the  button to re-execute the computation.</p>	<p>The integral <math>\int x^3 + 5 x^2 + x + 3 \, dx</math> is equal to</p> $\frac{1}{4} x^4 + \frac{5}{3} x^3 + \frac{1}{2} x^2 + 3 x$ , as you can plainly see.

**Tip:** Pressing [F5] allows you to easily toggle between math input and text input.

**Tip:** In math mode, the cursor is slanted and has a dotted box around it. In text mode, the cursor appears as a vertical bar.

**Tip:** To check what mode you are in, look at the top left of the toolbar. In text mode it will look like



. In math mode it will look like





. You can also use

these buttons to change modes as an alternative to pressing F5.

## ▼ Plotting

Maple can produce 2-D and 3-D plots of equations and expressions.

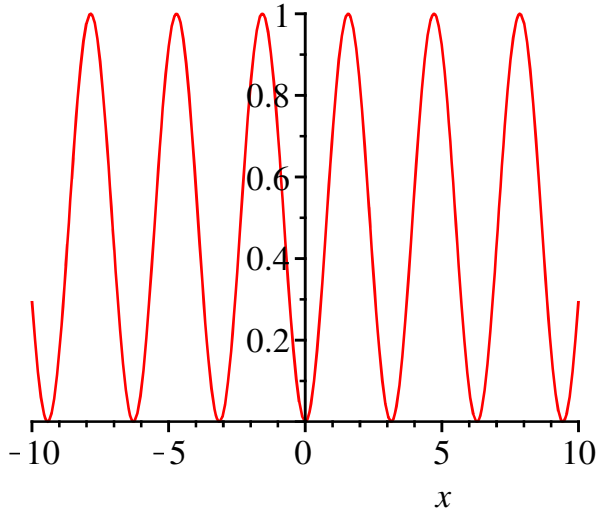
Steps	Results
<p><b>2-D Plots</b></p> <p>Now we will demonstrate plotting in Maple. The fastest way to plot an expression in Maple is to use the context menu.</p> <p>Example: Enter an expression in <math>x</math> (e.g. <math>\sin^2(x)</math>), right-click on the expression, and select <b>Plots</b> &gt; <b>2-D Plot</b>.</p> <p><i>Example:</i> Use the point probe to find the coordinates of different points in the graph. Click on the plot, then move the cursor to different locations. The coordinates are displayed in the top left of the plot toolbar.</p> <p><i>Example:</i> To pan the plot, right-click on the plot, and select <b>Manipulator</b>&gt;<b>Pan</b>. Hold down the left mouse button and use the mouse to move the plot around. To scale the plot, perform the same steps, but select <b>Manipulator</b>&gt;<b>Scale</b>.</p> <p><i>Tip:</i> You can also change the manipulator tool by clicking on the plot, and then selecting the appropriate tool from plot toolbar at the top of the Maple window: .</p> <p>The enhanced point probe tool can find the point on the curve closest to your cursor, and allows you the ability to extract the coordinates of the cursor and paste them anywhere in the document, in the form of a valid Maple object.</p>	<p><math>\sin^2(x) \rightarrow</math></p> 

## Combining Plots

You can easily add another plot on the same set of axes.

Example: Enter another equation in  $x$  (e.g.  $\sin\left(\frac{x}{2}\right)$ ), highlight the new expression with your mouse, hold down the [Ctrl] key and drag it onto the plot.


$\sin^2(x) \rightarrow$

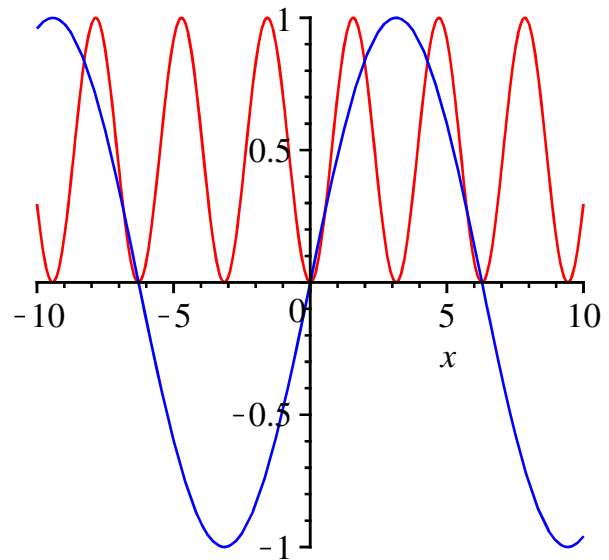


$\sin\left(\frac{x}{2}\right)$

## Annotating Plots

You can add additional information to plots by using the drawing tools. Lines, arrows, text, 2D math, and shapes are available.

**Example:** Click on the plot, then click on the button on the  toolbar. Use

the text tool (T) to enter labels for the curves. Use [F5] to toggle between text and math, and standard Maple math editor entry keystrokes.

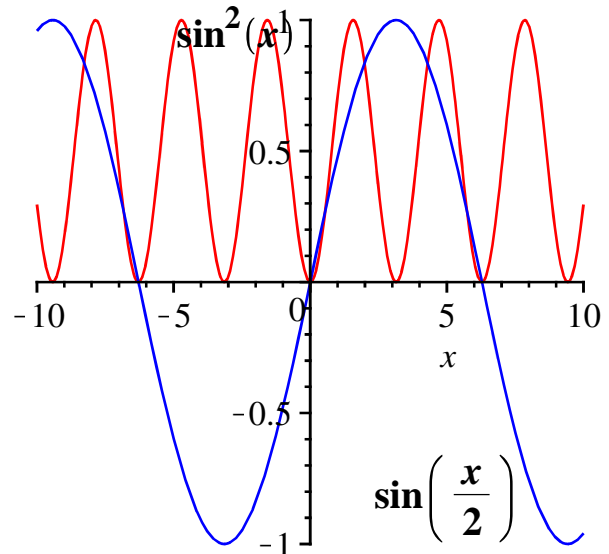

## 3-D Plots

**Example:** Enter an expression in  $x$  and  $y$  (e.g.  $\sin(x) \cdot y$ ). Right-click on the expression and use **Plots > 3-D Plots > x,y** from the context menu.


**Example:** Rotate the plot by clicking on the plot, holding down the left mouse button and moving the mouse.

**Example:** Pan and scale the plot by selecting a different tool from the **Manipulator** list on the context menu. Now when you hold down the mouse button and move the mouse, the new action is performed.

**Tip:** You can also change the manipulator tool by clicking on the plot, and then selecting the appropriate tool at the top of the Maple window:



$$\sin(x) \cdot y \rightarrow$$

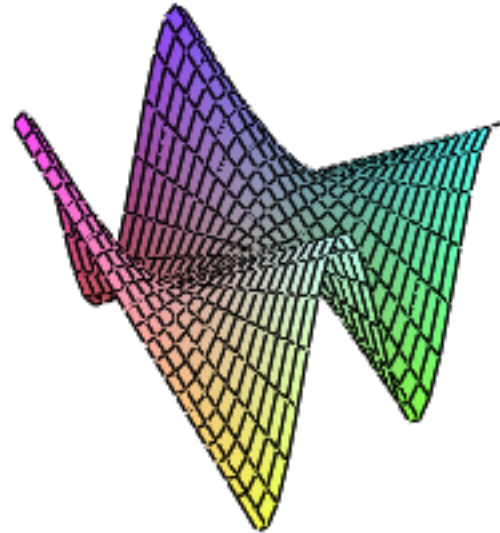

## Plot Options

You can modify the look of your plot in a variety of ways.


Plot options can be changed by right-clicking on the plot and modifying the options within the context menu. Note that the choices available in the context menu are specific to 3-D plots.

**Example:** Right-click on the plot to obtain the context menu. Click **Transparency** and modify the plot transparency.

Plot options can also be changed by clicking on the plot, selecting the Plot toolbar at the top of your Maple worksheet, and selecting the relevant options.



**Example:** Click on the image, from the toolbar select **Plot > Axes > Boxed**.

$$\sin(x) \cdot y \rightarrow$$

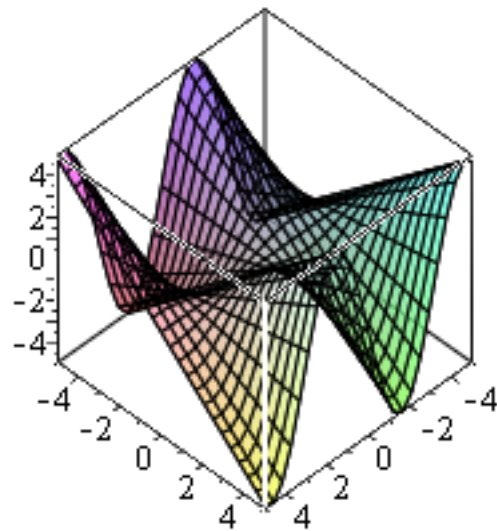

## ▼ Task Assistants and Tutors

As explored above, context menus are one way to solve problems without using Maple commands. Task assistants provide another method. Tutors are useful for teaching and exploring mathematical concepts. The full list of assistants and tutors can be found on the **Tools** menu.

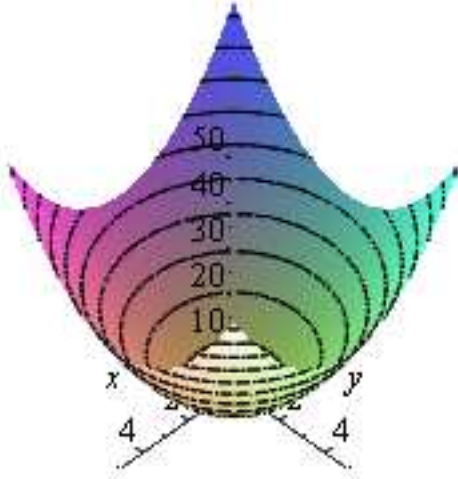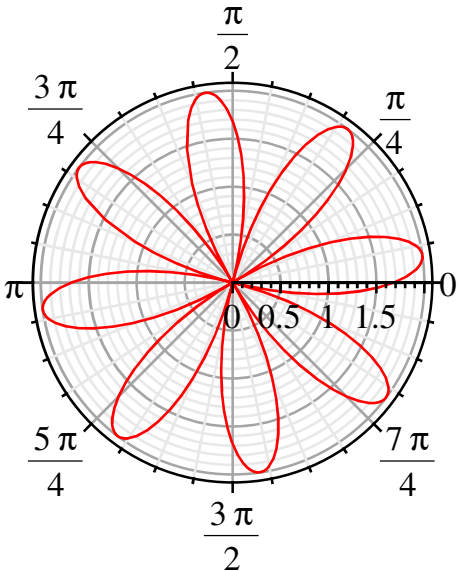
Steps	Results
<p><b>Using the Plot Builder Assistant</b></p> <p>Plots can easily be created in Maple using the builtin Plot Builder.</p> <p><i>Example:</i> Enter the expression you want to plot. From the context menu, select <b>Plots &gt; Plot Builder</b>. Using the Plot Builder, you can choose the kind of plot you want, add titles, and set options, all at once. This example shows a 3-D plot with the use of <b>plot title</b>, <b>normal axes</b> and <b>style of surface with contours</b>.</p>	<p><math>x^2 + y^2 \rightarrow</math></p> <p>My Plot</p> 
<p>The Plot Builder allows you to create more than just ordinary 2-D and 3-D plots. The example on the right is a polar plot.</p> <p><i>Example:</i> Enter the expression <math>2 \sin(4t + 1)</math>. Select <b>Plots &gt; Plot Builder</b> from the context menu. Select <b>2-D Polar Plot</b> from the <b>Select Plot Type</b> list box, then click <b>Plot</b>.</p>	<p><math>2 \sin(4t + 1) \rightarrow</math></p> 

You can also create an animation using the Plot Builder assistant.

**Example:** Enter the expression on the right, right-click to invoke the context menu. Select **Plots > Plot Builder > Animation** from the **Select Plot Type** drop-down list, and click the **Plot** button.

Now click on the plot image - some new, plot-specific, buttons will appear at the top left of your worksheet. Click  and watch the animation.

$$\frac{\sin(a \cdot \sqrt{x^2 + y^2})}{\pi^2} \rightarrow a = 0.$$

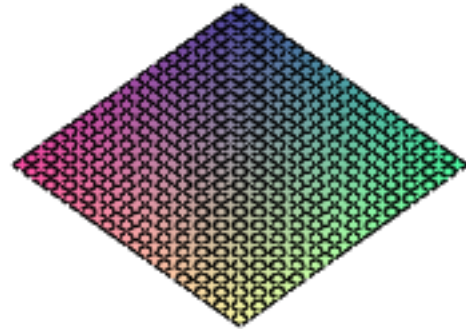


## Using the ODE Analyzer Assistant

Another useful Maple assistant is the ODE Analyzer.

**Example:** Enter the differential equation on the right. Select Solve DE Interactively from the context menu of this differential equation. Under **Conditions**, click **Edit** to add initial conditions, such as  $y(0) = 0$  and  $y'(0) = \pi$ . Select **Solve Numerically** and press **Plot**.

$$\frac{1}{3}y'' + y' + y = \sin(x) \xrightarrow{\text{solve DE interactively}}$$

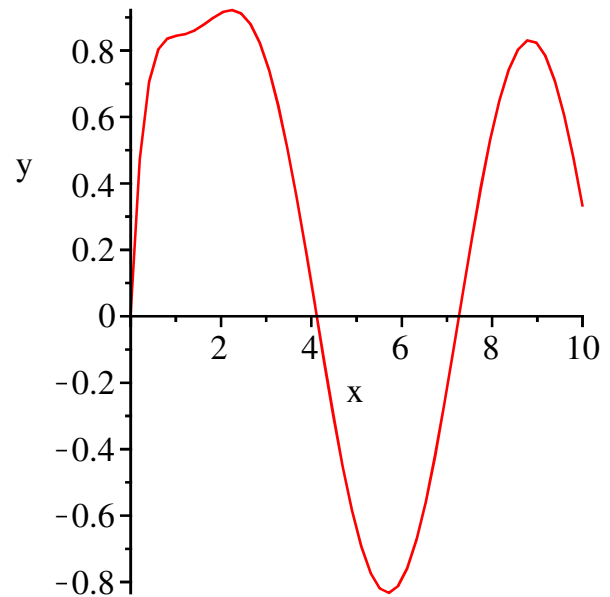

## Using the Exploration Assistant

The **Exploration Assistant** allows you to instantly create interactive mini-applications used to explore the parameters of the expressions

*Example:* Enter the expression you want to explore. Select **Explore** from the context menu. In the submenu, input the parameters you would like to test. If you do not want to explore a variable, check the box next to skip. A new document will open with the function and sliders. Move the sliders to see the results for the given values.

$$\int x \cdot \sin(x)^a \cdot \cos(x)^b dx$$

## Using Tutors in Maple

Maple provides several tutors which are useful for teaching and exploring mathematical concepts in the subjects of:

Calculus - Single-Variable

Calculus - Multi-Variable

Complex Variables

Differential Equations

Linear Algebra

Numerical Analysis

Precalculus

Vector Calculus

*Example:* From the menu, select **Tools > Tutors > Calculus - Single Variable > Integration Methods**. Enter a function and follow the example through by applying the correct rule at each step and using the "Get Hint" button for help.


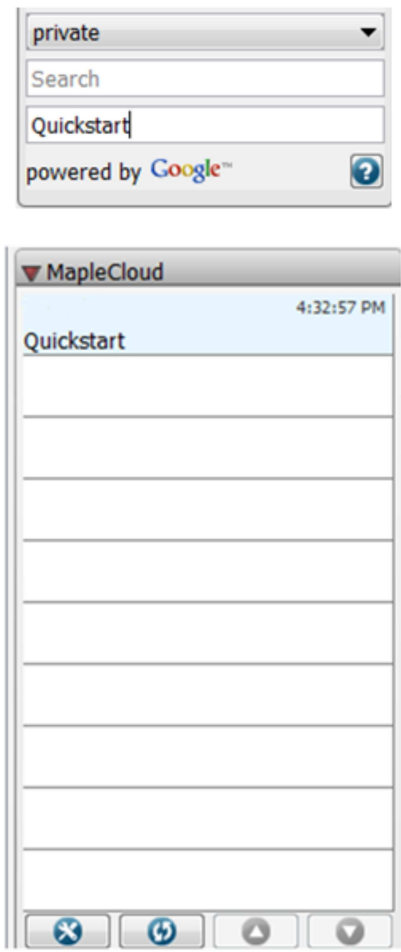
## ▼ Entering Commands

While many operations in Maple can be done through the use of context menus and other interactive tools, Maple also has a rich command language.

Steps	Results
<p><b>Entering Maple Commands</b></p> <p>Many commands are grouped together in packages. You can type the long name, or enter a <b>with()</b> command prior to using a command from that particular package.</p> <p><b>Example:</b> Create a Matrix, M, and apply the command <code>LinearAlgebra[Determinant](M)</code> to find the determinant of M.</p> <p><b>Note:</b> If you do not provide the package name, Maple does not know the definition of this function, and so simply returns the unevaluated expression.</p> <p>You can avoid having to type the long-form of each command by pre-loading the desired package. You can use a colon at the end of the command to suppress output.</p> <p><b>Example:</b> Load the LinearAlgebra package first using a colon. Try again without the colon to see the difference.</p> <p><b>Example:</b> Now calculate the Determinant of M using the short-form of the command.</p> <p>Command completion is very useful when typing out long command names.</p> <p><b>Example:</b> Type Gau, then press[Ctrl]+[Space] to see a list of possible completions. Use the arrow key to select the desired command and press [Enter], or select the command with the mouse.</p> <p><b>Tip:</b> Many packages can be loaded through <b>Tools &gt; Load Package</b>. See <b>Tools &gt; Load Package &gt; List All Packages...</b> to see the complete list.</p>	$M := \begin{bmatrix} 1 & 2 \\ 3 & 5 \end{bmatrix} \quad (7.1)$ $\begin{bmatrix} 1 & 2 \\ 3 & 5 \end{bmatrix} \quad (7.1)$ $\text{LinearAlgebra}[Determinant](M) \quad (7.2)$ $-1 \quad (7.2)$ $\text{Determinant}(M) \quad (7.3)$ $\text{Determinant}\left(\begin{bmatrix} 1 & 2 \\ 3 & 5 \end{bmatrix}\right) \quad (7.3)$ $\text{with(LinearAlgebra)} : \quad (7.4)$ $\text{Determinant}(M) \quad (7.4)$ $-1 \quad (7.4)$ $\text{GaussianElimination}(M) \quad (7.5)$ $\begin{bmatrix} 1 & 2 \\ 0 & -1 \end{bmatrix} \quad (7.5)$

## ▼ Maple Cloud

Easy access to the MapleCloud™ gives you a revolutionary way to share work with colleagues and students. Maple provides a single integrated environment for creating, distributing, and receiving technical documents through the MapleCloud Document Exchange. Access to the MapleCloud is seamlessly integrated into the Maple environment. You can easily and instantly share your work among a group of colleagues, with your class, or with Maple users worldwide, without the need for separate tools or cumbersome uploading and downloading.

Steps	Results
<p><b>Adding a file to your private group</b></p> <ol style="list-style-type: none"><li>1. Press  to go to the login screen</li><li>2. Enter your login information, or create a new account</li><li>3. Press close</li><li>4. In the group dropdown, select private</li><li>5. In the share your document field enter "Quickstart." Press Enter.</li><li>6. A message window will appear saying that your document has been posted. Your document will now appear in the cloud.</li></ol> <p>For more information on the <a href="#">MapleCloud</a>, see the help pages.</p>	 <p>The screenshot shows the MapleCloud interface. At the top, there is a dropdown menu set to 'private', a search bar containing 'Quickstart', and a 'powered by Google™' logo. Below this is a window titled 'MapleCloud' with a timestamp of '4:32:57 PM'. The window displays a list of search results, with 'Quickstart' as the first entry. The interface includes standard navigation buttons at the bottom.</p>

## ▼ Document Editing and Formatting Tools

Maple contains numerous word processing tools to help you create professional-looking reports. For your reference, here is a list of some of the more common ones.

Feature	Where to Find It
Built-in title and headings styles	Drop-down list on toolbar
Sections and subsections	<b>Insert &gt; Section, Insert &gt; Subsection</b>
Tables	<b>Insert &gt; Table</b>
Ability to edit table properties	Right-click anywhere in the table, then select <b>Table&gt;</b>
Drawing canvas	<b>Insert &gt; Canvas</b>
Font control and ability to define new styles	Toolbar buttons, <b>Format &gt; Styles...</b>
Ability to insert images, spreadsheets and other objects	<b>Insert &gt; Image, Insert &gt; Object</b>
A spell-checker aware of mathematical terms	<b>Tools &gt; Spellcheck</b>
Hyperlinks and bookmarks	<b>Format &gt; Convert to &gt; Hyperlink</b> <b>Format &gt; Bookmarks...</b>
Ability to add headers and footers	<b>View&gt;Header Footer</b>
Export to HTML, PDF, etc.	<b>File &gt; Export As</b>

## ▼ Configuring the Maple Environment

You can customize the Maple environment in many ways. Below is a list of the most common ones. Note that any option set through the **Options** menu can be set just for this session, or globally (every time you start Maple).

Feature	How to Control Feature
Start-up dialog	Turn it off by clearing the check box on the dialog. Turn it on again through <b>Tools &gt; Options, Interface</b> tab. See it anytime by <b>Help &gt; Startup Dialog...</b>

<p>Quick Help displayed on new documents</p>	<p>Turn it off by clearing the check box on the quick help. Turn it on again through <b>Tools &gt; Options, Interface</b> tab. See it anytime by pressing [F1].</p>
<p>Option for new documents to start in Document mode (no prompt, context menu commands hidden) or Worksheet mode (prompts, all commands shown).</p>	<p><b>Tools &gt; Options, Interface</b> tab. Default format for new worksheets...</p>
<p>Option to enter math in 2-D (default) or 1-D (Note: Choice only available in worksheet mode. All math must be entered in 2-D in document mode.)</p> <p>You can also control the input type for individual lines, without changing the overall default.</p>	<p><b>Tools &gt; Options, Display</b> tab Input Display...</p> <p><math>x^2</math> vs. <math>x^2</math></p> <p>Use context menu on the line above. Selecting <b>Convert to &gt; 2-D Math Input</b> turns the above line into <math>x^2</math></p>
<p>Number of digits displayed in calculation results. Maple displays 10 digits by default (though it calculates with more).</p>	<p><b>Tools &gt; Options, Precision</b> tab Round screen display to..</p> <p>For example, show the floating point value of <math>\pi</math>. The default result is: <math>evalf(\pi)</math> <math>3.141592654</math> (10.1)</p> <p>After setting the screen display to 5, the result is: <math>evalf(\pi)</math> <math>3.141592654</math> (10.2)</p>
<p>Add item to Favorites Palette.</p> <p>Palettes can be reordered, and individual palettes can be moved from one dock to the other, or turned off completely.</p> <p>Palette docks can also be expanded and collapsed.</p>	<p>Right-click on palette button, <b>Add to Favorites Palette</b></p> <p><b>View &gt; Palettes &gt; Arrange Palettes...</b></p> <p>Use the <b>View &gt; Palettes</b> menu, or the small arrows at the top of the palette to expand and collapse. For the left-hand-side dock, these arrows are in the top-right corner of the palette, to the right of the scroll bar.</p>